American Standard

Installation Instructions T028.900

DECK MOUNT TUB SYSTEMS
DAZZLE TRIM KIT

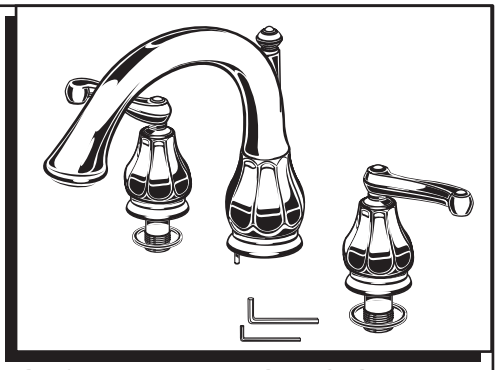

Certified to comply with ANSI A112.18.1
U.S. Patent No. D403,750

M968495 Rev. 1.2

Thank you for selecting American-Standard...the benchmark of fine quality for over 100 years.

To ensure that your installation proceeds smoothly–please read these instructions carefully before you begin.

Recommended Tools



Drill with 3/16" bit

Phillips Screwdriver



Flat Blade Screwdriver

Adjustable Wrench

Channel Locks

1 SPOUT INSTALLATION

- Complete FINISHED DECK before trim installation.
- Turn off the water supplies.
- Remove the GUARDS **(1)** from the VALVE BODIES **(2**). Remove the GUARD **(3)** and 1/4" PLUG **(4)** from the SPOUT SHANK **(5)**.
- The SPOUT SHANK **(5)** height should be 1" to 2" above the FINISHED DECK. Cut the SPOUT SHANK **(5)** if necessary. **Remove all burrs and bevel the end of the shank. Failure to do so may damage the SPOUT O-ring during installation and cause water leakage.**
- Drill a 3/16" hole in the finished deckfor spout locking pin. See TEMPLATE for location.

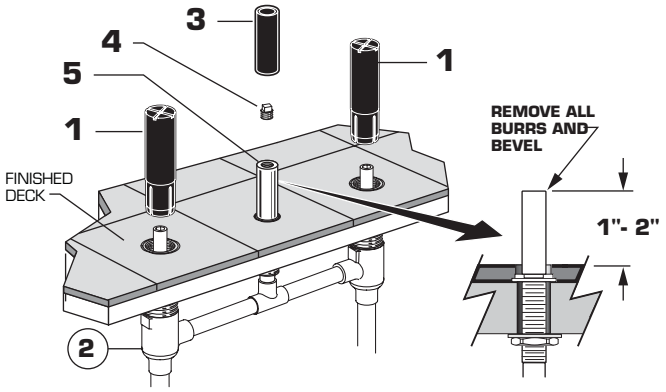

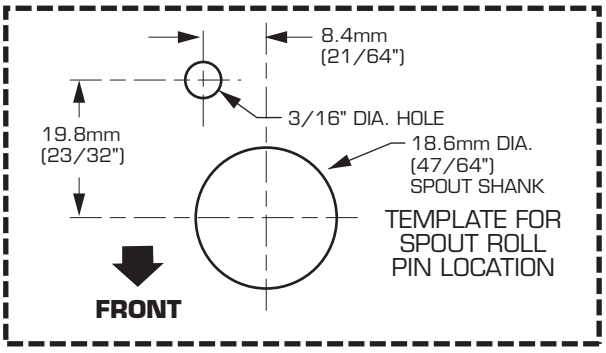

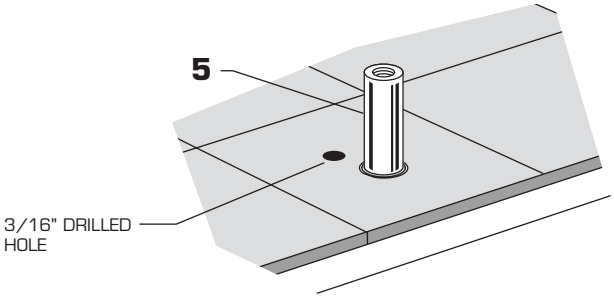

1A SPOUT INSTALLATION

- Lubricate the SPOUT ADAPTER O-RING **(6)** and SPOUT O-RING **(7)**.
- Push SPOUT ADAPTER **(8)** on SPOUT SHANK **(5)** and align slot in SPOUT ADAPTER **(8)** with 3/16" drilled hole.
- Tighten SPOUT ADAPTER SET SCREW **(9)** securely with 4mm HEX KEY **(10)** supplied.
- Position the RUBBER RING **(14)** in the groove in the base of the ESCUTCHEON **(11)**. Push the SPOUT **(12)** with ESCUTCHEON **(11)** down onto the SPOUT ADAPTER **(8)** and tighten the SET SCREW **(13)** securely with the 5mm HEX KEY **(15)** supplied.

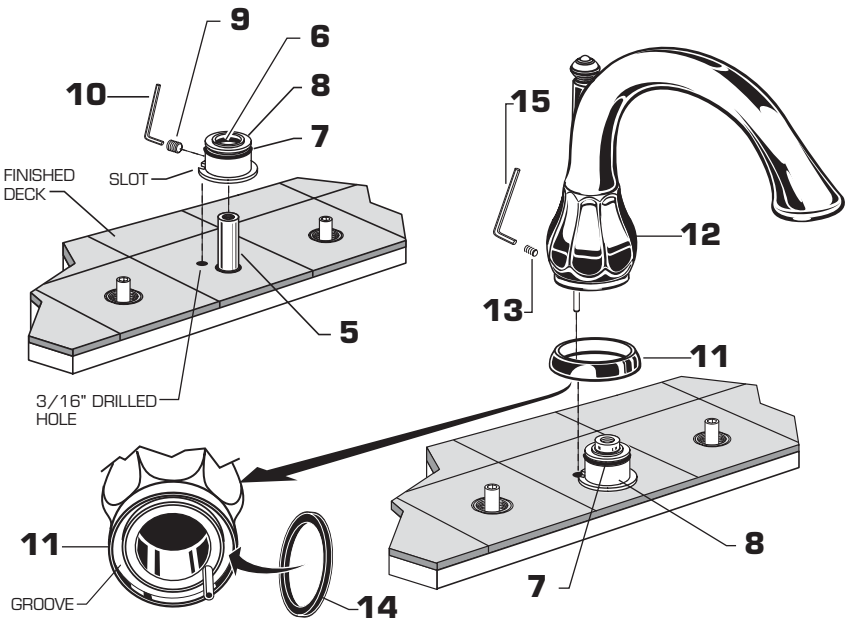

2 INSTALL HANDLE ADAPTERS

- Place the ESCUTCHEON SEALS **(1)** into groove of DECK ADAPTERS **(2)**.
- Align the HANDLE STEM **(3)** with the SLEEVE **(4)** as necessary.
- Thread the HANDLE ADAPTER **(5)** into the VALVE BODY **(6)** until the DECK ADAPTERS (2) contacts tight against the finished deck.

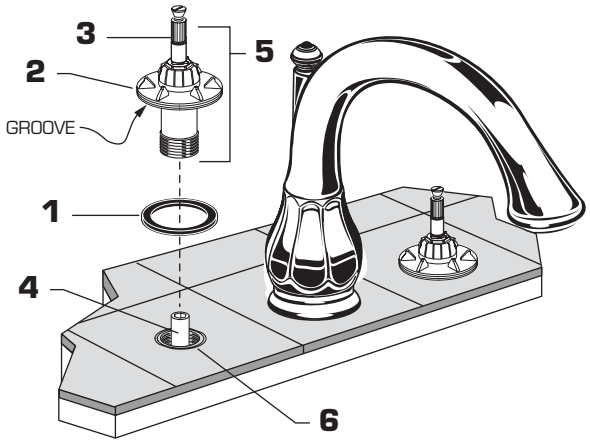

3 INSTALL HANDLES

- Push ADAPTER **(1)** on VALVE STEM **(2)**, so that the hole of the ADAPTER **(1)** without a spline is facing up. See figure "A". Tighten STEM SCREW **(3)** to secure ADAPTER **(1)**.
- Find correct position of LEVER HANDLE ASSEMBLY **(4)** by adjusting male teeth on ADAPTER **(1)** to female teeth in HANDLE **(4)**.
- Thread LEVER HANDLE ASSEMBLY **(4)** onto DECK ADAPTER **(5)** until snug against mounting surface. Repeat steps for opposite handle.

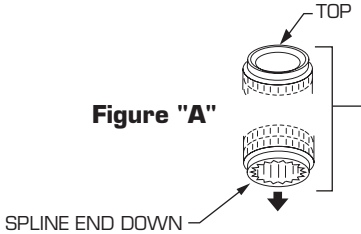

Figure "A"

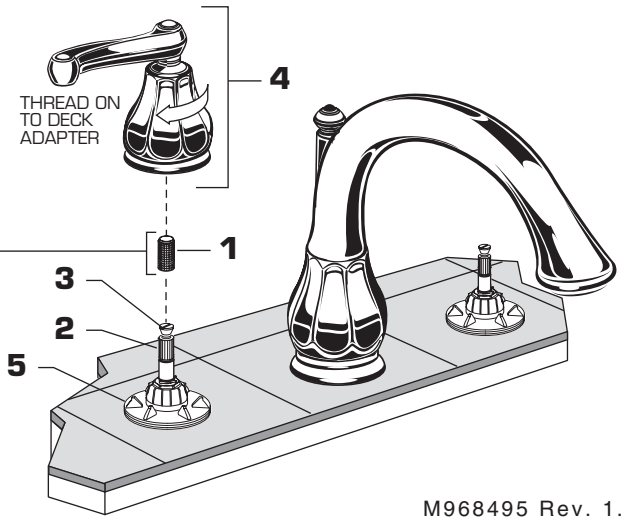

4 TESTING

- Turn the HOT HANDLE clockwise and the COLD HANDLE counterclockwise to the off position.
- Unscrew and remove the STREAM STRAIGHTENER.
- Slowly turn on the water supplies.
- Operate the HANDLES to flush water lines thoroughly. Check SPOUT connection for leakage.
- Turn the Handles off. Replace the SPOUT END.

5 SERVICE

To change the direction of handle rotation

Turn off the water supplies

- Turn HANDLE **(1)** to the off position.
- Unthread the HANDLE BASE **(2)** from HANDLE ADAPTER (3).
- Unthread HANDLE ADAPTER **(3)** and remove.
- Remove VALVE LOCKNUT **(4)**. A 17mm deep socket is required.
- Remove the CARTRIDGE **(5)** by pulling up on the SLEEVE **(6)**.
- Remove SCREW **(7)** and pull off SLEEVE **(6)**.
- Remove the SPRING CLIP **(8)**.
- Remove the STOP WASHER **(9)**. Turn it 90˚ and replace.
- Replace the SPRING CLIP **(8)**.
- Reverse the above steps to reassembly the components.
- If the spout drips, operate the handles several times from the off to the on position. Do not force - the handles only turn 90˚.

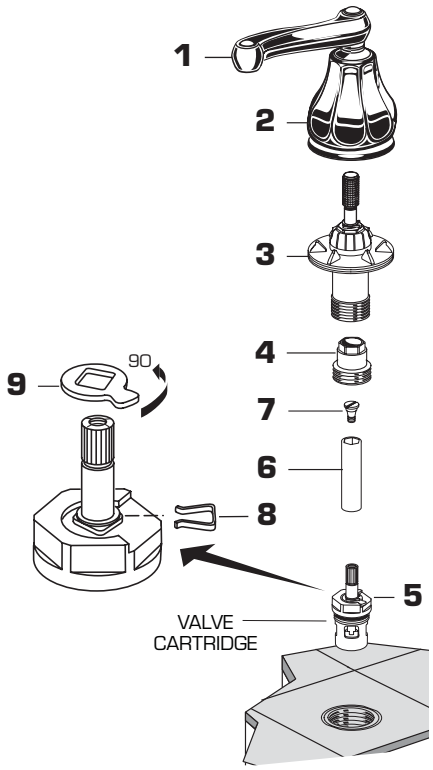

6 CARE INSTRUCTIONS:

DO: SIMPLY RINSE THE PRODUCT CLEAN WITH CLEAR WATER. DRY WITH A SOFT COTTON FLANNEL CLOTH.

DO NOT: DO NOT CLEAN THE PRODUCT WITH SOAPS, ACID, POLISH, ABRASIVES, HARSH CLEANERS, OR A CLOTH WITH A COARSE SURFACE.